

EUC-060SxxxDTM000x

60W IP66

90-305Vac

THD 10%

500 mA	1	90 ~ 305 Vac 127 ~ 300 Vdc			2			
						120Vac	220Vac	

60W IP66

			0.35 A	100%	120Vac
	-	-	0.35 A	100%	220Vac
(I ² t)	-	-	0.26 A ² s		220Vac 25°C 10%Ipk-10%Ipk = 236 μs
	0.90	-	-		120-277Vac, 50-60Hz, 75%-100% (45-60W)
	-	-	15%		
	-	-	10%		120-240Vac, 75%-100% (45-60W)

	-8%lo	-	8%lo	100%	
	-	50%lo	75%lo	100%	
	-	5%lo	10%lo	100%	
EUC-060S070DTM0004	-	-	160V		
EUC-060S070DTM	-	-	160V		
EUC-060S105DTM0004	-	-	100V		
EUC-060S105DTM	-	-	100V		
EUC-060S180DTM0006	-	-	60V		
EUC-060S180DTM0004	-	-	60V		
	-	-	± 5.0%	100%	
	-	-	± 5.0%		

1.5 s 2.0 s 120Vac, 75%-100% sr3 wD | —“ A , è “0 Q öf& 0À \,™w



Cree XLamp XP-G2 220Vac 25°C


@120Vac: EUC-060S070DTM0004 EUC-060S070DTM EUC-060S105DTM0004 EUC-060S105DTM EUC-060S180DTM0006 EUC-060S180DTM0004 EUC-060S180DTM	86.0% 85.0% 85.0% 85.0% 85.0% 84.0% 84.0%	88.0% 87.0% 87.0% 87.0% 87.0% 86.0% 85.0%	- - - - - - -	100% 25
@220Vac: EUC-060S070DTM0004 EUC-060S070DTM EUC-060S105DTM0004 EUC-060S105DTM EUC-060S180DTM0006 EUC-060S180DTM0004 EUC-060S180DTM	88.0% 87.0% 87.0% 87.0% 87.0% 86.0% 85.0%	90.0% 89.0% 89.0% 89.0% 89.0% 88.0% 87.0%	- - - - - - -	100% 25
@277Vac: EUC-060S070DTM0004 EUC-060S070DTM EUC-060S105DTM0004 EUC-060S105DTM EUC-060S180DTM0006 EUC-060S180DTM0004 EUC-060S180DTM	88.0% 87.0% 87.0% 87.0% 87.0% 86.0% 85.0%	90.0% 89.0% 89.0% 89.0% 89.0% 88.0% 87.0%	- - - - - - -	100% 25
-		475,000 Hours	-	220Vac 25 80% (MIL-HDBK-217F)
-		95,900 Hours	-	120Vac 80% 70°C ,
	-40 °C	-	+88 °C	
	-40 °C	-	+75 °C	5 : 10% RH to 100% RH.
	-40 °C	-	+85 °C	: 5% RH to 100% RH
(L × W × H) (L × W × H)	3.74 x 2.52 x 1.26 95 x 64 x 32			4.41 x 2.52 x 1.26 112 x 64 x 32
	-	410 g	-	

Cree XLamp XP-G2 25°C

0~10V	0 V	-	20 V	
0~10V	0 A	200 A	250 A	
	10%Iomax	-	100%Iomax	
	0 V	-	10 V	


UL/CUL	UL 8750, UL 1310, CAN/CSA-C22.2 No. 250.13, CAN/CSA-C22.2 No. 223-M91
CE	EN 61347-1, EN61347-2-13
KS	KS C 7655
EMI	
EN 55015 ⁽¹⁾	Conducted emission Test & Radiated emission Test
EN 61000-3-2	Harmonic current emissions
EN 61000-3-3	Voltage fluctuations & flicker
FCC Part 15 ⁽¹⁾	ANSI C63.4 Class B This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: [1] this device may not cause harmful interference, and [2] this device must accept any interference received, including interference that may cause undesired operation.
EMS	
EN 61000-4-2	Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS
EN 61000-4-4	Electrical Fast Transient / Burst-EFT
EN 61000-4-5	Surge Immunity Test: AC Power Line: line to line 4 kV, line to earth 6 kV
EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS
EN 61000-4-8	Power Frequency Magnetic Field Test
EN 61000-4-11	Voltage Dips
EN 61547	Electromagnetic Immunity Requirements Applies To Lighting Equipment

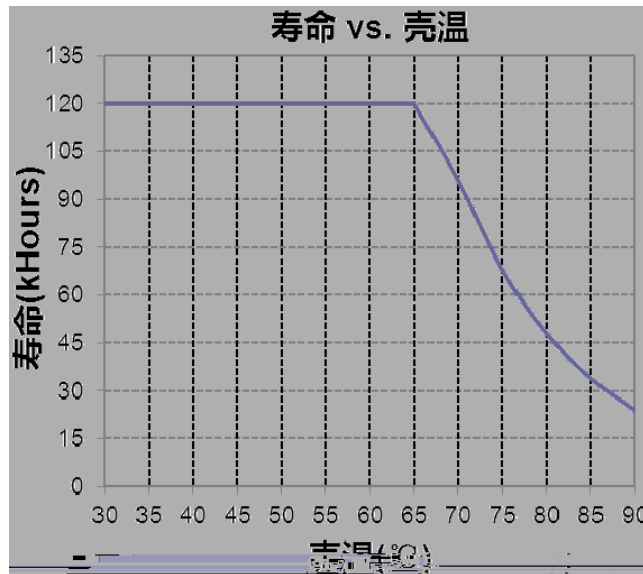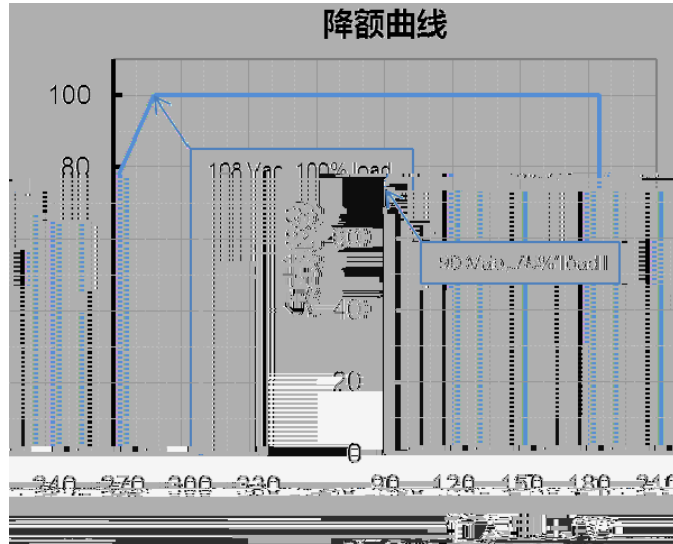

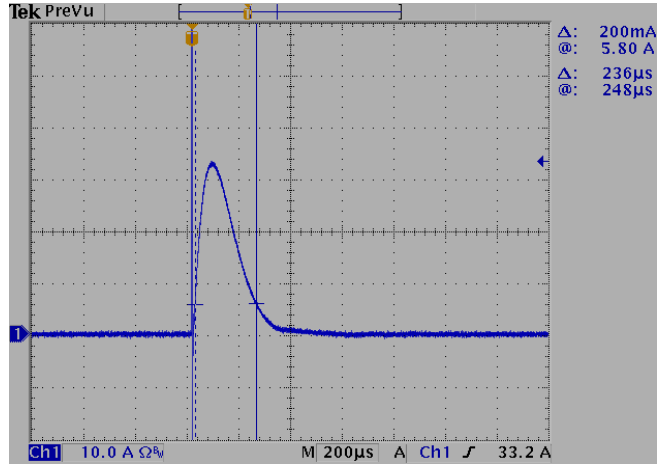


EUC-060S070DTM($I_o=700mA$)

效率 vs. 输出电压

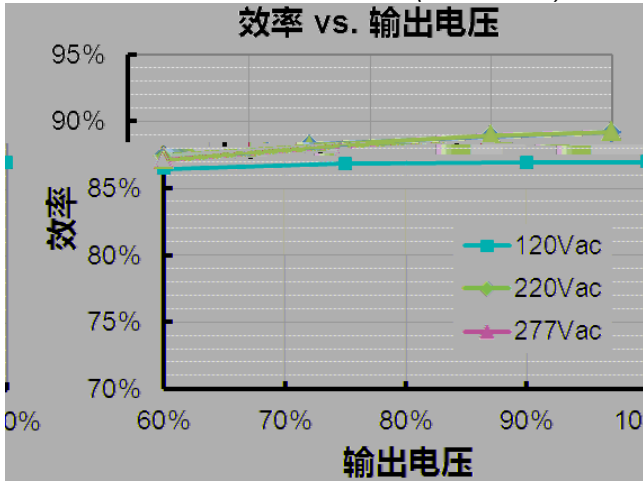

EUC-060S070DTM0004($I_o=500mA$)

效率 vs. 输出电压

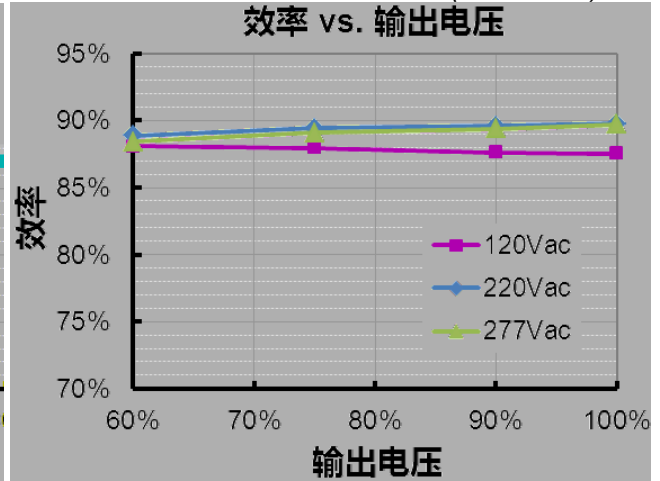


EUC-060S105DTM($I_o=1050mA$)




EUC-060S105DTM0004($I_o=860mA$)


效率 vs. 输出电压

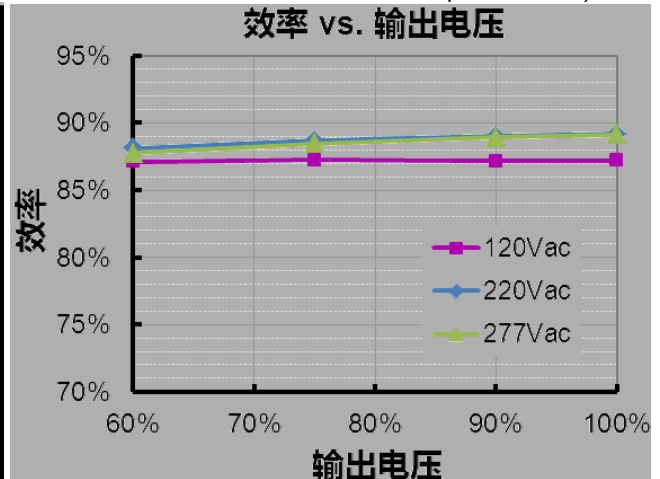



EUC-060S180DTM($I_o=1800mA$)

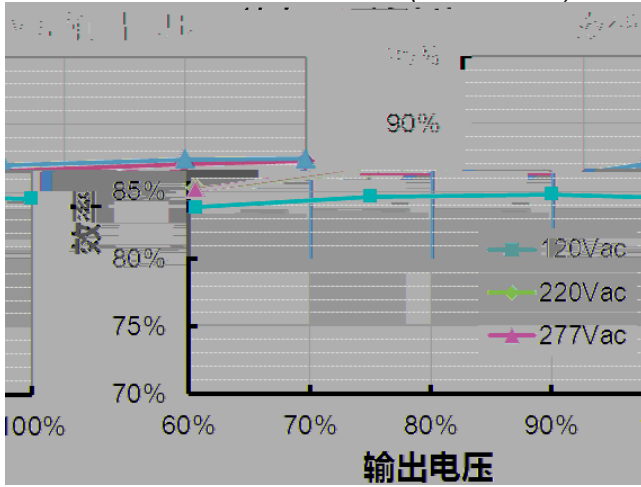


EUC-060S180DTM0004($I_o=1400mA$)

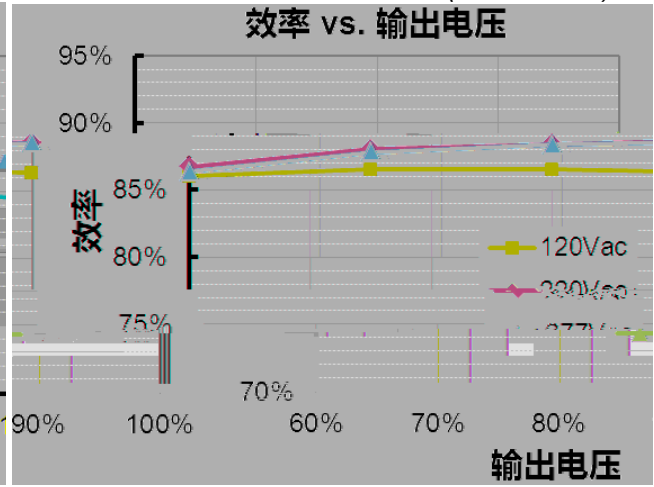


EUC-060S180DTM0006($I_o=1200mA$)

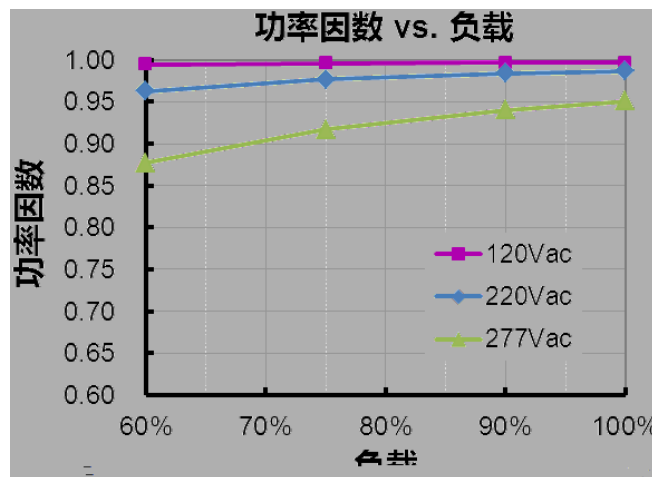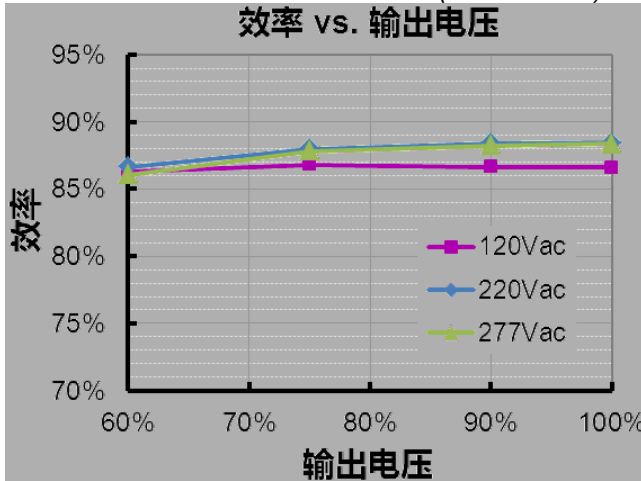


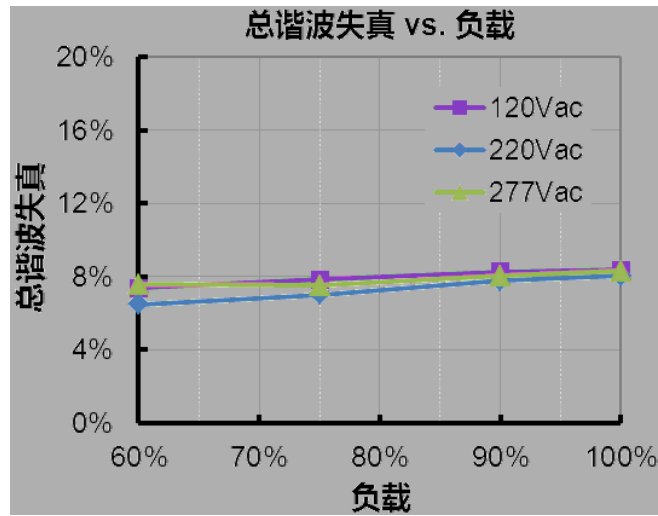


			80± 10V		85± 10V
		330 Vac	340 Vac	350 Vac	
		300 Vac	320 Vac	340 Vac	
		-	-	380 Vac	

●

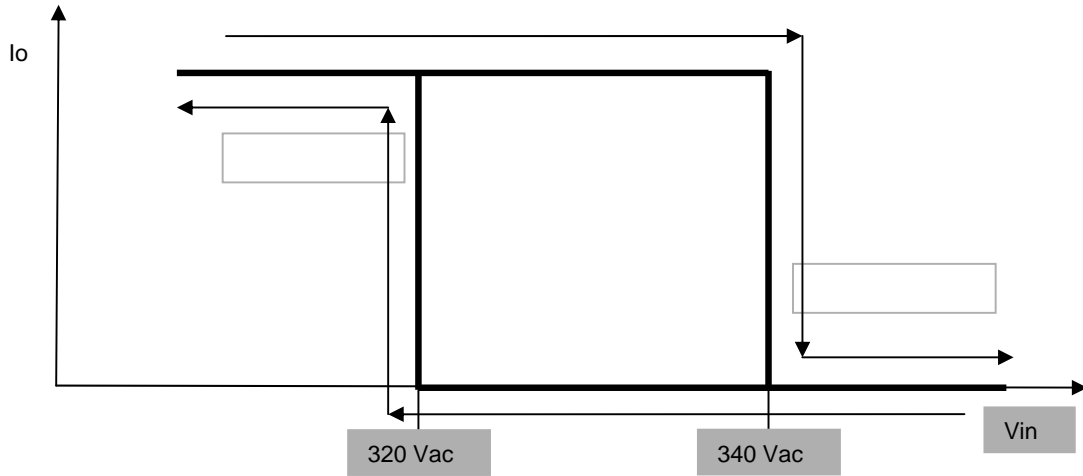

● 0-10V

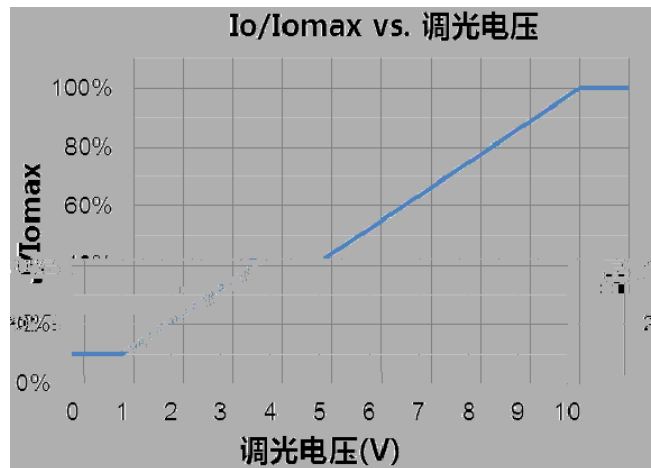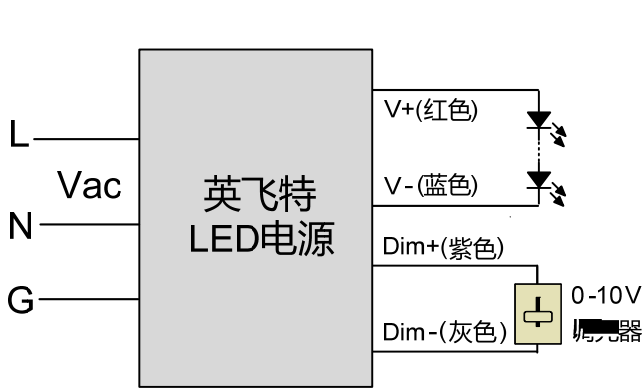

1 DC

1. 0-10V
2. Dim- V- V+
3. Dim+

PROJ:

2017-03-06	A		/	/