

- 
- 4kV, 6kV
- 
- IP67 UL
- SELV
- Class I, Division 2
- 5



EUV-150SxxxST

150W

90-305Vac

	1			2			3
					110Vac	220Vac	

1 UL 100-277Vac; 100-240Vac KS  
 2 220Vac, 100%

	90 Vac	-	305 Vac	
	47 Hz	-	63 Hz	

	-	-		UL8750; 277Vac/ 60Hz
	-	-		IEC60598-1; 240Vac/ 60Hz
				100Vac 100%
	-	-		220Vac 100%
I <sup>2</sup> t				220Vac 25 10%-10% =1.2 mS
	0.90	-	-	100~ 277Vac 50-60Hz 100%
	-	-	20%	

				100%
				100%
(pk-pk)				: 20MHz 0.1uF 10uF
/				
	-	-		100%
	-	-		
				110Vac 100%
				220Vac 100%
				/ : 1 A/uS : 25% ~ 75%
	-	°		=0°C ~ Tc


				100% 25° 1%

				100% 25° 1%
				110 Vac 25 80% (MIL-HDBK-217F)
				220 Vac 80% 60
			°	@ 90-305 Vac
			°	@ 198-305 Vac
				@ 90-305 Vac 5
				@ 198-305 Vac 5
(L x W x H)				8.90 x 2.66 x 1.56
(L x W x H)				226 x 67.5 x 39.5
			-	

<b>EMI</b>	
<b>EMS</b>	

EMS	

: 1 EMI ( ) EMI  
 2 , / ( )  
 ( IEC 60598-1-10.2)

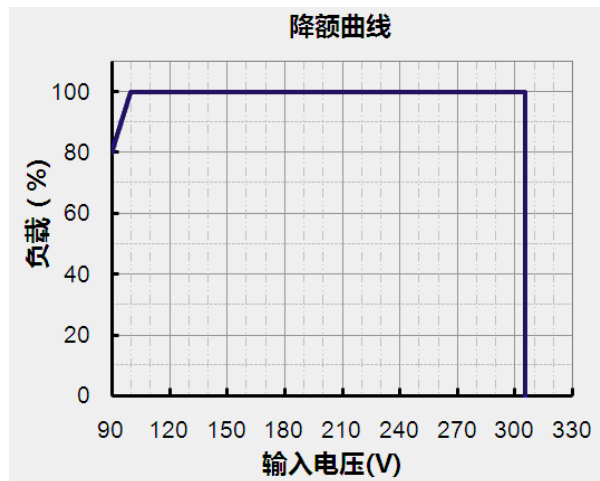

EUV-150S012ST33 0049 0-1TT131 T102070 020503 T1004 TTT120528 T1036 1TT1T036 1TT1T527T10

2

1.0mm<sup>2</sup>

10A.

2

2



2015-09-11	P			
			/	
			/	
			/	
			/	
2017/11/14	Q	KS	/	
			5	
		/		
			0.02%/°C	0.03%/°C
			/	
			/	
2019-01-25	R			IP67
			/	
		-	1000g	1100g
2020-01-06	S		4kV, 6kV	4kV, 6kV
			(°C)	
			/	



2021-07-16	T		/	